

Why you should choose Tarkett Sommer?

Everyone has different views about flooring. Some consider economy and service life to be most important. Others put the flooring's environmental impact first. Some are more concerned with design. Some even put ergonomics at the top of their list. All these characteristics take first place on our list. With a flooring from Tarkett Sommer you can concentrate without distraction on what you consider to be most important – the flooring's function. Everything else is included automatically. We know about flooring. That is why you should choose Tarkett Sommer.

Economy

We can tell in plain terms what our floor coverings withstand and their long-term cost. With a correctly cared-for Tarkett Sommer flooring, your maintenance costs reduce considerably. We can also say confidently that you can reduce the overall cost of the floor by up to 30%.

Ecology

The whole of our business and organisation is permeated by environmental thinking. The maintenance of our floor coverings requires minimal unnecessary cleaning chemicals, and dramatically reduces the consumption of precious fresh water. Our environmental programme has recently resulted in our Ronneby factory becoming certified according to ISO 14001 and EMAS.



Ergonomics

The Tarkett Sommer Cleaning System minimises wet cleaning methods. It reduces the heaviest parts of the work, such as wet mopping and lifting heavy buckets. The result is that the risk of injuries caused by strain is considerably reduced.

Design

With the widest choice of colours and patterns on the market we give you the opportunity to create the right interior environments, and constant stimulation that is difficult to resist. With a Tarkett floor you can be sure that your original design concept will stay fresh, year after year.

The Classic choice

When you are looking for a floor with a long service life, choose Optima. Optima is inherently durable because it is made of vinyl. The flooring is patterned all the way through its wear layer, whether it is 1.5 mm or 2.0 mm.

So the pattern stays the same regardless of the amount of wear, just as the creators of Optima intended. Their objective was to create a flooring whose elegance was matched by the length of its service life. The result was Optima, whose quality has been proven by its performance in different types of buildings around the world.

Choose one of the floor designs that are presented here, or create a pattern installation that is unique to you. Whatever the



project, Optima will always be able to contribute to the best solution.

To claim that Optima is a classic flooring in itself would be presumptuous. But it is true to say that it is perfect for creating interiors that can become classics with time.



The Modern choice

For a long time Optima's many colours have given you the opportunity to create modern solutions that are well ahead of their time.

Now we are offering you even more inspiration. You should see our new colours as additions to an already extensive palette.

Combine them as you wish, and create interiors that until now you have only dreamt of. We can state confidently that there is still no other flooring that safeguards the pattern


image year after year the way Optima does. It is unique, and ideal when you want a design that lasts.

When Optima was first launched it made a radical contribution to the variety of available floor coverings. Thanks to the homogeneous construction with PUR, the reinforcement that gives better cleanability, Optima is ideal for schools,

hospitals and other places with high demands.

The PUR-reinforced surface also means that precious fresh water can be saved and minimal cleaning chemicals are needed to clean Optima. On an area of 10,000 m² you can save up to 1 tonne of chemical waste annually. Optima is also recyclable, of course.

So Optima is the modern choice in every respect.

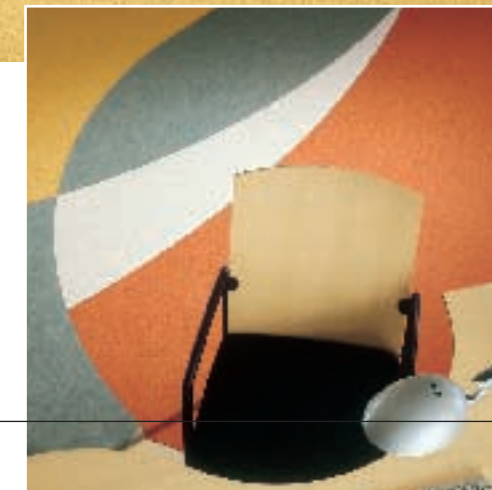

The Optimal choice




Evert Engqvist was one of the people initially involved in the research and development of Optima. To hear about how he and his team developed Optima is a pleasure.

Today others are continuing to develop Optima's colours so they correspond to what

our customers want today. Inspiration is drawn from modern interior design, among other sources, and we monitor trends around the world to make sure we get it right.

The result is 30 new bright colours for you to work with.

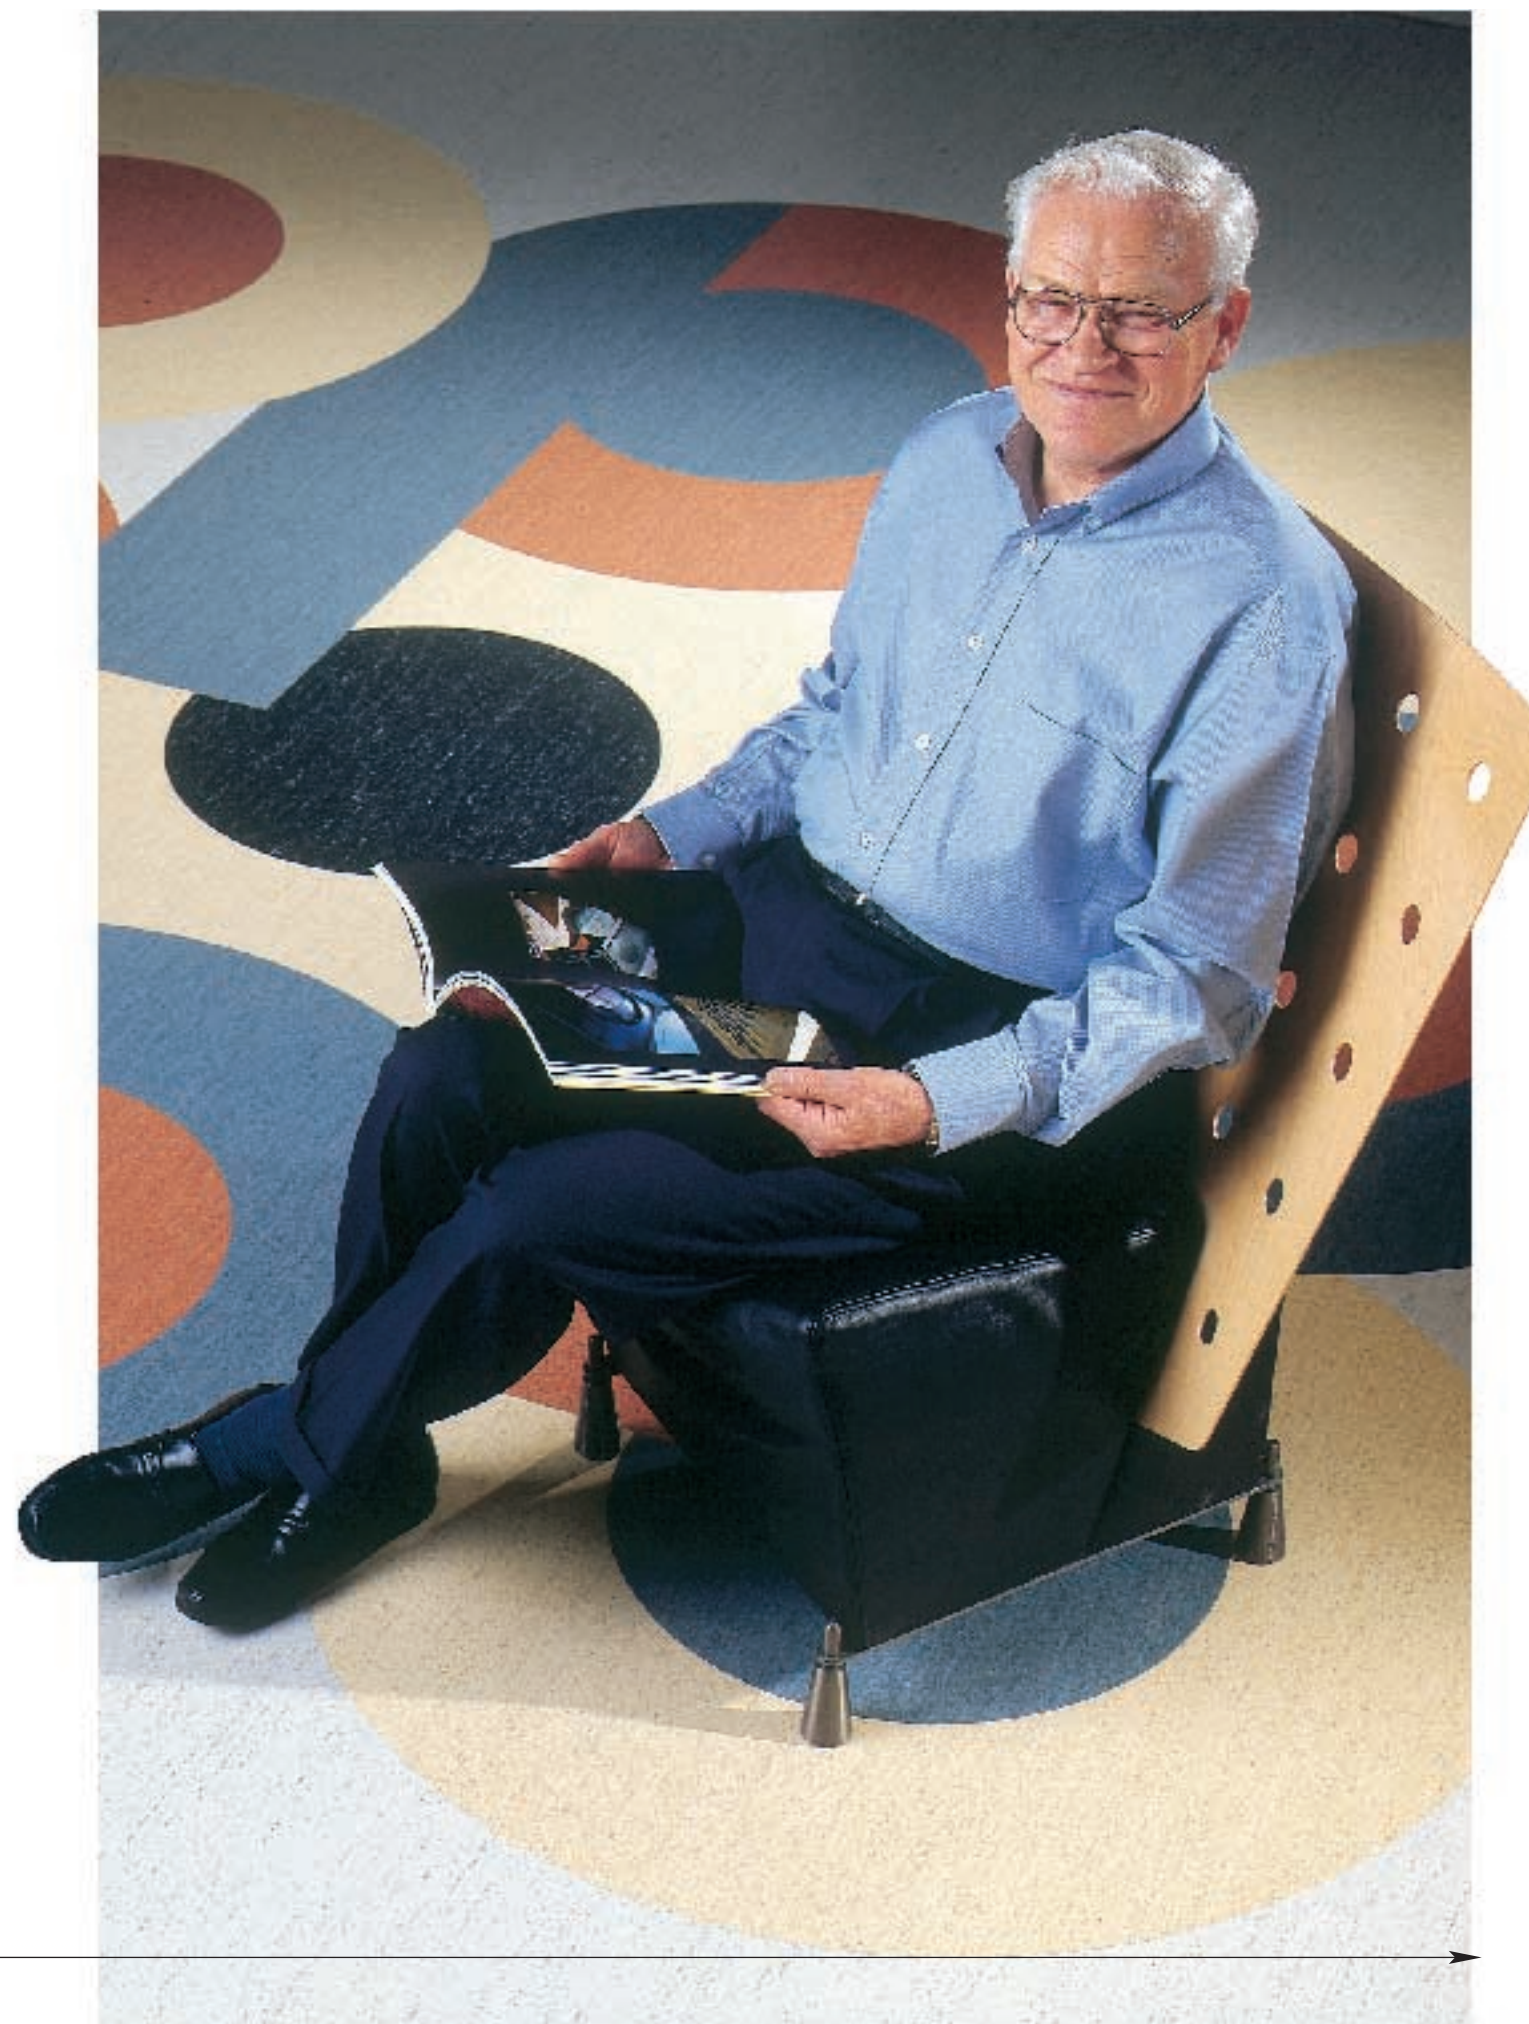

Colour samples and borders

- Colours and products shown are used as a guide. Any colour combination from the Eminent, Granit or Optima range can be used.
- Dimensions: Border: Length 1000 mm. Corner: 100 mm square.
- Minimum order: 10 Borders.
- Minimum order: 10 Corners.
- To be ordered on the Tarkett Border Order Form.
- Please allow three weeks from order to delivery.



CLASSIC
ART. NO. 32955004



CORFU
ART. NO. 32955001



CAPETOWN
ART. NO. 32955002



SERPENTINE
ART. NO. 32955003



FRESHWATER
ART. NO. 32955000



ROPE
ART. NO. 32955005



CHARDONNAY
ART. NO. 32955014




CLASSIC
ART. NO. 32955012



SQUARE
ART. NO. 32955009



DIAMOND
ART. NO. 32955017



CIRCLE
ART. NO. 32955010




WAVE
ART. NO. 32955008



CROWN
ART. NO. 32955011




LEAF
ART. NO. 32955015



862
(NCS S 1000-Y)
Welding rod. No. 32918620



825
(NCS S 2010-Y40R)
Welding rod. No. 32912030




827
(NCS S 2020-Y30R)
Welding rod. No. 32924430




828
(NCS S 3020-Y30R)
Welding rod. No. 32921010




829
(NCS S 1010-Y30R)
Welding rod. No. 32913420



831
(NCS S 3030-Y30R)
Welding rod. No. 32918310




830
(NCS S 2020-Y50R)
Welding rod. No. 32918300




834
(NCS S 3020-Y50R)
Welding rod. No. 32918340




838
(NCS S 3040-Y60R)
Welding rod. No. 32918380




841
(NCS S 3010-G10Y)
Welding rod. No. 32918410




843
(NCS S 5010-G10Y)
Welding rod. No. 32924530



819
(NCS S 3020-B50G)
Welding rod. No. 32918190




848
(NCS S 4030-B50G)
Welding rod. No. 32918480




817
(NCS S 4010-B30G)
Welding rod. No. 32918170




858
(NCS S 3020-B)
Welding rod. No. 32912100




849
(NCS S 2020-R80B)
Welding rod. No. 32923780




851
(NCS S 4020-R90B)
Welding rod. No. 32918510




835
(NCS S 5020-R90B)
Welding rod. No. 32920300



810
(NCS S 2005-Y50R)
Welding rod. No. 32918100




821
(NCS S 2005-Y30R)
Welding rod. No. 32918210




839
(NCS S 3505-Y20R)
Welding rod. No. 32918390




864
(NCS S 2500-N)
Welding rod. No. 32912140




853
(NCS S 3502-B)
Welding rod. No. 32923880




866
(NCS S 6502-B)
Welding rod. No. 32912160




845
(NCS S 8502-B)
Welding rod. No. 32918450




855
(NCS S 1050-Y20R)
Welding rod. No. 32920170



861
(NCS S 2060-Y60R)
Welding rod. No. 32918610



863
(NCS S 5030-B90R)
Welding rod. No. 32918630



844
(NCS S 4040-R90B)
Welding rod. No. 32918440



808
(NCS S 3060-Y90R)
Welding rod. No. 32918080



Optima


Optima is a low maintenance homogeneous commercial vinyl flooring. The range has been broadened to include 30 colourways allowing for greater colour choice. This breadth of range means Optima is suitable for all style of interiors. It is suitable for use in heavy commercial installations. Optima is reinforced with polyurethane (PUR) which means no seals, waxes or polishes are required. As a result of this reinforcement the product is extremely durable and maintenance is simpler as dirt finds it difficult to adhere and scuff marks simply wipe away. Life Cycle cost are therefore greatly diminished.

Optima is produced in both sheets and tiles.

It is also available in a 1.5 mm version which can be used as a wet area flooring or a heavy duty wall vinyl.*

Technical data		OPTIMA
Type of floor covering	EN 649	Homogeneous vinyl flooring
Classification	EN 685	Commercial: 34 Industrial: 43
Wear layer thickness	EN 429	2.0 mm
Polyurethane reinforced		yes
Total thickness	EN 428	2.0 mm
Weight/m ²	EN 430	2.9 kg
Abrasion / thickness loss	EN 660: Part 1	Group P: ≤ 0.15 mm
Residual indentation	EN 433	approx. 0.03 mm
Wear by chair castors	EN 425	suitable
Underfloor heating		suitable
Electrical resistance R _i	EN 1081	approx. 10 ¹⁰ Ohm
Static electrical charge	EN 1815	< 2 kV
Impact sound insulation	EN ISO 717/2	approx. + 4 dB
Thermal resistance	DIN 52612	0.011 m ² K/W
Fire test	DIN 4102 BS 476: Part 7, 1997 prEN 13501-1 prEN ISO 9239-1	B1 Class 2 Class B _{s1} s1 ≥ 8 kw/m ²
Colour fastness	EN 20105-B02	≥ level 6
Chemical resistance	EN 423	good resistance
Colours		30
Form of delivery	EN 426 Sheet (rolls)	approx. 25 running metres x 200 cm art. no. 3242_ _ _ 5 3 digit colour number
	EN 427 Tiles (box)	61x61 cm 14 tiles / box = 5.21 m ² art. no. 3217_ _ _ 0 3 digit colour number

Tarkett Sommer's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett Sommer at the address shown for these instructions. Optima's high vinyl content allows 90° coving without cove formers.



All colours also available as tiles.

Please contact your nearest Tarkett Sommer office for delivery details.

***The following colours are available in 1.5 mm thickness:**
819, 827, 831, 834, 838, 844, 848, 858, 862, 864.



- No polis
Just dry-
the lift
- Much less
- Savings
life-cycle
- Unique
the perf

Australia: Tarkett Sommer Pty Ltd - Tel. +61 2 96 34 73 73 • **Austria:** Tarkett Sommer Ges.m.b.H. - Tel. +43 1 47 88 062

• **Belgium:** s.a. Tarkett Sommer n.v. - Tel. +32 2 520 04 67 • **Canada:** Domco Tarkett Inc. - Tel. +1 450 293 3173 • **Denmark:**

Tarkett Sommer A/S - Tel. +45 43 90 60 11 • **Finland:** Tarkett Sommer Oy - Tel. +358 9 682 31 20 • **France:** Tarkett Sommer SA -

Tel. +33 1 41 20 41 20 • **Germany:** Tarkett Sommer Vertriebs GmbH & Co KG, Bereich Objekt - Tel. +49 6233 810 • **Greece:** Tarkett

Sommer Monoprosopi Ltd - Tel. +30 1 5763889 • **Hong Kong:** Tarkett Sommer Asia Pacific Ltd. - Tel. +852 2511 8716 • **Italy:**

Tarkett Sommer S.p.A. - Tel. +39 02 319 211 • **Mexico:** Tarkett Sommer - Tel. +52 55 56 51 25 94/99 • **Middle East:** Tarkett

Sommer Middle East - Tel. +961 1 75 2363/4 • **Netherlands:** Tarkett Sommer Benelux BV - Tel. +31 765 780 760 • **Norway:** Tarkett

Sommer AS - Tel. +47 32 20 92 00 • **Poland:** Tarkett Sommer Polska Sp. z o.o. - Tel. +48 22 833 10 97 / +48 22 639 30 25 •

Portugal: Tarkett Sommer SA - Tel. +351 21 756 75 40 • **Russian Federation:** Sommer Russia - Tel. +7 095 937 74 50/51 •

Singapore: Tarkett Sommer Far East - Tel. +65 743 53 84 • **Spain:** Tarkett Sommer SA - Tel. +34 91 358 00 35 • **Sweden:** Tarkett

Sommer Försäljnings AB - Tel. +46 8 625 19 00 • Tarkett Sommer AB Ronneby - Tel. +46 457 710 00 • **Switzerland:** Tarkett

Sommer GmbH - Tel. +41 62 737 90 50 • **United Kingdom:** Tarkett Sommer Ltd - Tel. +44 (0)1905 342700 • **United States:**


Domco Tarkett Inc. USA - Tel. +1 610 266 5500

www.tarkett-sommer.com



Tarkett Sommer

Illustration & Design: Artistic Vision Inc. / www.dakotadisplay.com - October 2001



Homogeneous vinyl flooring



Optima



Top-quality, low maintenance
vinyl floor-covering

Elegant

Easy to maintain

- 1.5 mm
- 2.0 mm
- Tiles



Tarkett Sommer